8" Color Network Based Video Door Phone Kit

HV-IPK-VL-802
Network Based Video Door Phone

RoHS Compliant
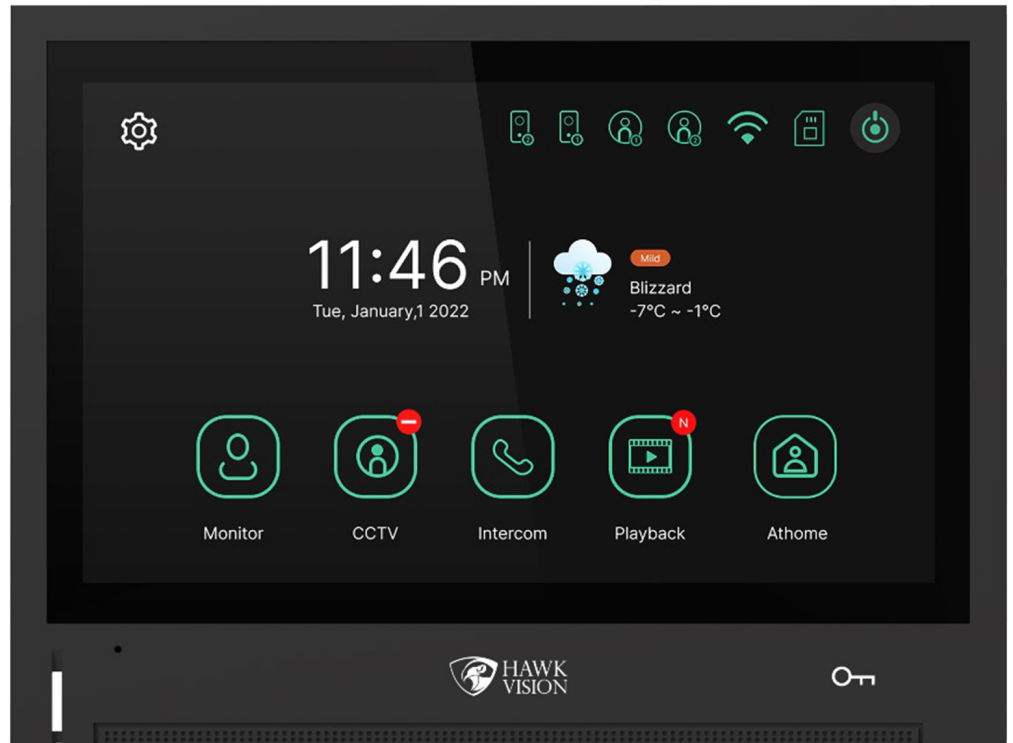
Features

- ✔ 8" LCD screen & Capacitive touch screen operation
- ✔ Support Wi-Fi
- ✔ 1080P FHD video resolution
- ✔ Support 4 outdoor unit and 4 monitor
- ✔ Can connect 2 IPC and 8 alarm sensors
- ✔ 30 Snapshot in built & video recording. External storage up to 128 GB
- ✔ Time & language adjustable
- ✔ IR lighting for night vision
- ✔ 120 ° wide camera angle
- ✔ IP65 water proof

Technical Specification
HV-IPK-VL-802
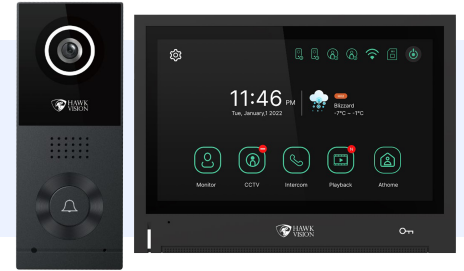
Indoor

System	Linux, OSD menu
CMOS	1/2.7'
Connection	2.4G WiFi on monitor, Cat5/Cat6 between outdoor and monitor
Video Resolution	1920 x 1080, 1080P
App	HawkSmart
Alexa & Google assistant	For option
Leaving Message	Support
Notification to mobile phone	Calls notification, Motion Detection notification Forward to mobile
Remote Unlocking	Remote unlocking via mobile app
Screen Size	8'' TFT, Capacitive IPS Touch Screen
Screen Resolution	1024*600
Brightness Setting	Yes
Contrast Setting	Yes
Colour Setting	Yes
Volume adjustment	Yes
Alarm sensors type	NO/NC
Operation system	Linux
RAM	DDR2 64/128MB
Flash memory	16M
Effective Area	54.21 (H)×85.92 (W)mm
Protocol	TCP/IP, RTSP
Talkback Type	Yes
External SD Card Support	Yes (Max.128GB Class 10)
Image Storage	Yes (In built memory for 30)
Image Storage Capacity	Yes (Based on SD Card)
Video Storage	Yes (Auto & Manual)
Video Storage Capacity	Yes (Based on SD Card)
Video Length	Max 80.s
Ringing Melody	6,users defined via SD card
Point to point intercom	Yes
Working mode	At home / Away / Sleep
Leaving message	Yes

Detection	Motion Detection by AI of the camera
Max. indoor unit	(1main + 3 secondary)
Max. outdoor unit	4(2door + 3 secondary outdoor)
External CCTV Support	2
External sensor	8
Operation Mode	Touch Screen
Dimension (LxWxH)mm	181mm x 181mm x 19.5mm
Working consumption	Standard by <7W, working <10W
Certifications	CE, FCC, ROHS

Outdoor

Camera type	Common wide angle digital camera
Door Lock Release	Support 2 electric locks
Camera sensor	1080P
Camera resolution	2MP
Viewing Angle	120°
Night Vision	IR LED
Mount	Surface Mount
MIC & Speaker volume	Adjustable
Mounting	Surface mount / Rain cover
Audio quality	Noise Suppression
Audio compression	G.711 U/64 Kbps
Audio intercom	Full Two way intercom
Audio input	Built in omnidirectional microphone
Unlocking port	No COM NC / 12V GND
Power port	15V DC / PoE
Wiring port	RJ45 / PoE
Outdoor unit size (L*W*H)mm	85x166x42
Exit button	Support
Operation Mode	Touch Screen
Waterproof	IP65