


## Network Camera

# HV-IP-D6530T-C1

## 3MP FULL COLOUR HD IP DOME CAMERA

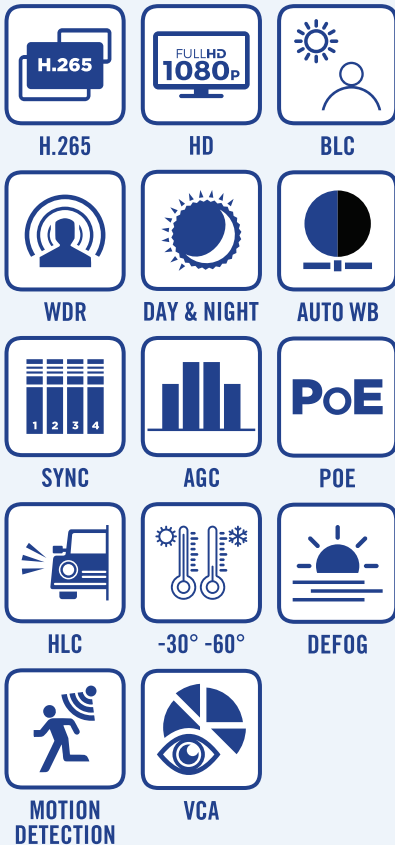

## Features

- ✓ Resolution up to 3MP(2304X1296@20fps)
- ✓ Support low bit rate and low latency
- ✓ H.265 efficient compression, saving bandwidth and storage space
- ✓ Support smart IR, prevent infrared overexposure at night
- ✓ ICR infrared filter-type automatic switching for real day and night monitoring
- ✓ Support built-in or external POE (optional)
- ✓ Support 3D digital noise reduction, support WDR
- ✓ Support automatic electronic shutter function to adapt to different monitoring environments
- ✓ Support ONVIF, SLINK protocol
- ✓ Color night vision

Specification are subject to change without notice. Hawk Vision is a registered trademark of AAA Security Solutions and its Overseas Subsidiary. All other trademarks belong to their respective owners. ©Copyright 2020 AAA Security Solutions. All rights reserved. Released 10/2020.



# Technical Specification

## HV-IP-D6530T-C1

<b>Model</b>	<b>HV-IP-D6530T-C1</b>
<b>Main Chipset</b>	Hi3516EV200
<b>Image Sensor</b>	1/2.9", 3MP progressive scan ultra-low illumination CMOS GC2083
<b>Effective Pixels</b>	3MP
<b>Min. Illumination</b>	Color: 0.1Lux@F1.2; B&W: 0Lux@F1.2(IR on)
<b>Lens</b>	3.6mm
<b>IR Distance</b>	15-20M
<b>Noise Reduction</b>	3D noise reduction
<b>WDR</b>	DWDR (off / low / medium / high)
<b>Mirror</b>	Off / horizontal mirroring / vertical mirroring / 180 ° rotation
<b>Image Setting</b>	Brightness / contrast / sharpness / saturation / chroma
<b>Humanoid Detection</b>	
<b>Responding Speed</b>	≤1s
<b>Maximum Detection</b>	5fps/s (color image)
<b>Detection Area</b>	Support specified area, default full screen
<b>Shielded Area</b>	Support 4 areas setting
<b>Upload Method</b>	Private protocol upload
<b>Trigger Method</b>	Video trigger
<b>Video and Audio Coding</b>	
<b>Encoding Format</b>	H.265/H.264
<b>Coding Characteristics</b>	Main stream: 2304X1296 @20fps; Sub stream: 720X576 @25fps
<b>Video Bit Rate / Type</b>	Fixed bit rate, variable bit rate(1280kbps-4Mbps) / Composite stream, video stream
<b>Audio Coding Standard</b>	G.711U/64Kbps
<b>Network Function</b>	
<b>Network Interface</b>	1*RJ45 10M/100M self-adaptive LAN port
<b>Network Protocol</b>	TCP/IP, UDP, HTTP, DHCP, RTSP, NTP
<b>Interface Protocol</b>	ONVIF
<b>Mobile Monitoring</b>	iPhone, Android
<b>Port</b>	
<b>Network Interface</b>	RJ45 10M/100M network adaptive
<b>POE</b>	Built in , external for optional
<b>Audio</b>	No
<b>General</b>	
<b>Operation T/H</b>	- 20°C ~ 55°C / 0%-90%
<b>Power Supply</b>	DC12V / POE optional
<b>Power Consumption</b>	<10W (MAX)
<b>Dimension</b>	L(86mm) x H(83mm) x W(85mm)
<b>Weight</b>	200g

Specification are subject to change without notice. Hawk Vision is a registered trademark of AAA Security Solutions and its Overseas Subsidiary. All other trademarks belong to their respective owners. ©Copyright 2020 AAA Security Solutions. All rights reserved. Released 10/2020.

**AAA SECURITY SOLUTIONS:** 231, 2ND FLOOR KRISHNA MARKET, PITAMPURA, NEW DELHI-110034

**SALES:** 011-47097440 | **SALES EMAIL:** INFO@HAWKVISIONINDIA.COM | **SUPPORT EMAIL:** SUPPORT@HAWKVISIONINDIA.COM